



C O U R S E M A S T E R A U T O P I L O T S

CM650




The Coursemaster CM650 autopilot is designed especially for professional mariners aboard fishing boats, charter boats, ferries, tugs and other work boats – both light-displacement and heavy-displacement.

It provides all the features you need to hold course in all sea conditions, including:

- Large graphic display you can see at a glance
- Easy knob control so you don't have to take your gloves off to alter course
- Interfaces with GPS and plotters
- Four sea state settings including working mode for trawling with nets
- Automatic trim to keep course in cross winds and seas, weather helm and other offsets
- Rudder angle indicator on graphic display
- Rate gyro sensor option for more accurate steering and reduced rudder activity
- Extensive range of drive options: hydraulic, mechanical rotary and solenoid.
- Easy installation with the computer and controller in one unit.

Like all Coursemaster Autopilots, the CM650 has the same toughness and reliability which has kept commercial vessels on course for more than 20 years. All are designed and built in Australia. And all are backed by Coursemaster's 20 year reputation for superior service.

Expanded Coursemaster Installation

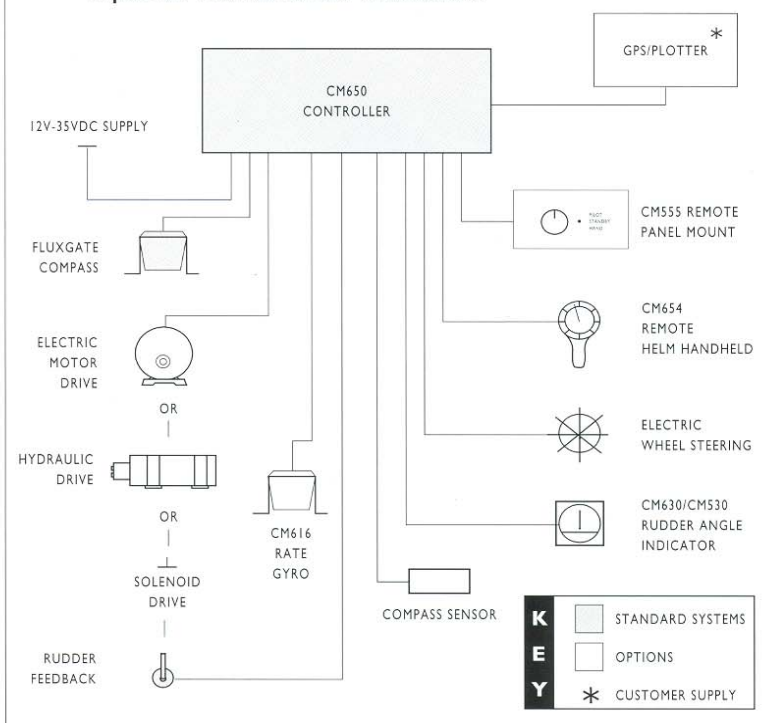

The **CM650** is simple to operate:

- Select *Standby* to turn the system on and view the vessel's heading and rudder angle on the display. Point the vessel in the direction you want to go and select *Pilot*. Your CM650 will hold that course. To change course simply turn the course knob to port or starboard.
- Select *Nav* to steer to waypoint information from a GPS or plotter. Select *Power* for power steering using the course knob.

SPECIFICATIONS

CM650 AUTOPILOT SYSTEM SPECIFICATIONS

INPUT VOLTAGE: 10-35 VDC
 ENVIRONMENTAL: 0 deg. - 50 deg.C
 STEERING SYSTEM TYPES: Hydraulic, Mechanical, Solenoid
 POWER CONSUMPTION: Standby: 300mAmps @ 12VDC
 Pilot - 2.5amps @ 20% duty cycle
 Using standard Hydraulic Pump or Mechanical Motor.
 HEADING SENSORS: Coursemaster fluxgate compass, pick off coil
 INTERFACING: Standard NMEA 0183
 INPUT: 2
 OUTPUT: 1
 ALARMS: Off course, watchkeeping, system.

CM650 CONTROLLER

DIMENSIONS: 250mm x 80mm x 175mm
 MOUNTING: Bracket Mount
 INPUT VOLTAGE: 10-35 VDC
 MOTOR DRIVE: 15A cont. 20A for 2 secs.
 NMEA 0183: 2 Input/output.

CM120 RUDDER FEEDBACK

DIMENSIONS: 97mm x 62mm (Arm 145mm)
 MOUNTING: Horizontal, vertical, inverted.
 CABLE: 9m 3 core shielded cable.

CM417 FLUXGATE COMPASS

OUTPUT: Sine/Cosine (and NMEA 0183)
 ACCURACY: 2 degrees RMS
 ROLL/PITCH: +/- 45 degrees.
 DIMENSIONS: 97mm x 55mm
 CABLE: 8m 5 core shielded cable.

CM555 REMOTE CONTROL

DIMENSIONS: 140mm x 90mm x 45mm
 MOUNTING: Panel
 CABLE: 9m - 6 core shielded cable.

CM654 REMOTE CONTROL

DIMENSIONS: 155mm x 60mm
 MOUNTING: Hand held
 CABLE: 9m - 6 core shielded cable.
 NOTE: (25.4mm = 1 inch).

CM616 RATE GYRO

It provides a far steadier course than any autopilot using only a fluxgate compass, and completely overcomes any acceleration effects or magnetic field influences.
 DIMENSIONS: 120mm x 115mm
 CABLE: 8m 5 core shielded cable.

DRIVE UNITS

MECHANICAL STEERING
 A state of the art 12 or 24 volt DC printed circuit motor with integral gearbox and electro-magnetic clutch.

CM151 MECHANICAL DRIVE
 VOLTAGE: 12 VOLT DC (avail. in 24 VDC.)
 TYPE: Reversing, Printed Circuit
 TORQUE: 120kg/cm @ 30RPM
 DIMENSIONS: 165mm x 160mm

HYDRAULIC STEERING - A range of self-contained reversing electro-hydraulic pump kits as well as continuous running pump kits to suit various size hydraulic steering systems.

CM1212 HYDRAULIC PUMP
 VOLTAGE: 12 VOLT DC (avail. in 24 VDC.)
 TYPE: Reversing
 CAPACITY: 1.2 Ltr/Min
 DIMENSIONS: 222 mm x 120mm

CM3012 HYDRAULIC PUMP
 VOLTAGE: 12 VOLT DC (avail. in 24 VDC.)
 TYPE: Continuous running, Solenoid control
 CAPACITY: 2 Ltr, Adjustable flow (other sizes available)
 DIMENSIONS: 485mm x 205mm

POWER STEERING - Standard system operates with solenoid valves when fitted to vessels with power assisted steering.

OPTIONS:

Other options are available including heavy duty rudder feedback, rudder angle indicators, electric wheel steering and remote alarm.
 Contact your dealer for information on these other options.

The specifications given above are correct at the time of publication. Coursemaster reserves the right to modify specifications in the interest of improving product quality.

COURSEMASTER AUTOPILOTS

Australia's world leader in autopilot technology.

ABN 25 001 306 369
 2/66 Gibbes Street,
 Chatswood NSW 2067
 AUSTRALIA
 Tel: + 61 2 9417 7097
 Fax: + 61 2 9417 7557

COURSEMASTER USA Inc.
 232 Richardson St,
 Greenpoint,
 NEW YORK 11222 USA
 Tel: (718) 383 4968
 Fax: (718) 383 1864

Email: sales@coursemaster.com
www.coursemaster.com

Distributed by:

Agenzia
 ufficiale per
 l'Italia :

Apel
mar
 Technology S.r.l.

Telefono 010 870058 r.a.
 Telefax 010 870248
 e-mail: apelmar@koden.it
<http://www.koden.it>